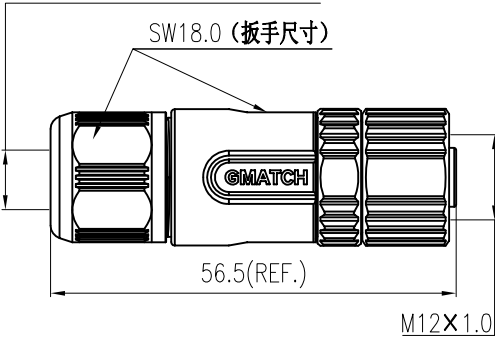

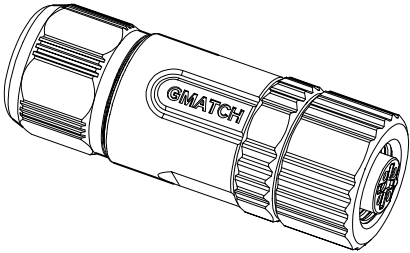


1	2	3	4	5	6	7	8	9	10	11									
H			版次 Rev.		ECN编号 ECN No.		修改说明 Reversion Description		设计 Designed		审核 Checked		核准 Approved		H				
G			CONNECTOR PARAMETERS 连接器参数		适配电缆OD范围(4-6,6-8,8-10) SW18.0 (扳手尺寸)   SW19.0 (扳手尺寸)									G					
															CORE NUMBER 芯数		3/4/5		F
															RATED VOLTAGE 额定电压		250/250/60 V		
															RATED CURRENT (40℃) 额定电流		4 A (40℃)		
															WITHSTAND VOLTAGE 耐电压		1.4/1.4/1.0 kV (R. M. S)		
															INSULATION RESISTANCE 绝缘强度		≥500MΩ		
															CONTACT MATERIAL 接触件材质		COPPER ALLOY 铜合金		
															TERMINAL TYPE 端接类型		SCREW 螺钉型		
															SHELL MATERIAL 外壳材质		ZINC CASTING 铸锌		
															INSERTS MATERIAL 插体材质		PA66+GF		
															OPERATING TEMPERATURE 工作温度		-40℃~+85℃		
															IP DEGREE IP 等级		IP67		
															WIRE GAUGE RANGE 线芯范围		0.14-0.75mm²		
															FLAMMABILITY 阻燃性		UL 94-V0		
															MECHANICAL OPERATION 机械寿命循环		≥100 cycles		
															E			M12B-PF03T-TSHD (4-6)	
M12B-PF03T-TSHD (6-8)		M12B-PF04T-TSHD (6-8)		M12B-PF05T-TSHD (6-8)															
M12B-PF03T-TSHD (8-10)		M12B-PF04T-TSHD (8-10)		M12B-PF05T-TSHD (8-10)															
孔位示意图 (3芯)		孔位示意图 (4芯)		孔位示意图 (5芯)															
D			HOLES ARRANGEMENT (3CORE)		HOLES ARRANGEMENT (4CORE)		HOLES ARRANGEMENT (5CORE)		D										
			NOTE: OX :接触件PIN数。NUMBER OF CONTACTS .																
			DX :适配电缆外径范围。THE RANGE OF CABLE OD SUITED .																
C			自由公差 Free Tolerances		第三视角 3RD-Projection				单位 Unit		mm		名称 Name		C				
			长度尺寸 Length Dimensions		核准 Approved								M12B 3/4/5芯螺钉型金属直头母插						
			X. ±0.20		审核 Checked								型号 Designation			M12B-PF OX T-TSHD XX			
			.X ±0.10		工艺 Craft								图号 Figure No.			/			
B			角度 Angle		标检 Standardized								A4		B				
			X. ±1.0°		设计 Designed								比例 Scale			1:1			
			.X ±0.5°										页码 Sheet			1 / 1			
A			3D MODEL / 3D模型		 3D MODEL / 3D模型									A					