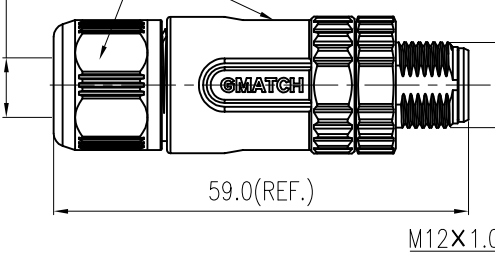
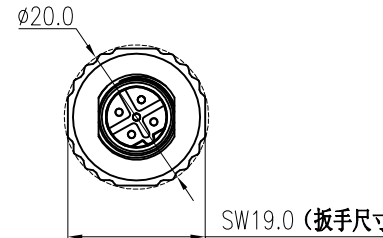






档案员 Archivist
日期 Date

1	2	3	4	5	6	7	8	9	10	11			
H CONNECTOR PARAMETERS 连接器参数			版次 Rev.	ECN编号 ECN No.	修改说明 Reversion Description			设计 Designed	审核 Checked	核准 Approved			
G	F E D C B A 3D MODEL / 3D模型			适配电缆OD范围 (4-6,6-8,8-10)									
SW18.0 (扳手尺寸)													
													
													
M12B-PM03S-TSHD (4-6)				M12B-PM04S-TSHD (4-6)			M12B-PM05S-TSHD (4-6)						
M12B-PM03S-TSHD (6-8)				M12B-PM04S-TSHD (6-8)			M12B-PM05S-TSHD (6-8)						
M12B-PM03S-TSHD (8-10)				M12B-PM04S-TSHD (8-10)			M12B-PM05S-TSHD (8-10)						
													
孔位示意图 (3芯)				孔位示意图 (4芯)			孔位示意图 (5芯)						
HOLES ARRANGEMENT (3CORE)				HOLES ARRANGEMENT (4CORE)			HOLES ARRANGEMENT (5CORE)						
NOTE: OX :接触件PIN数。NUMBER OF CONTACTS .													
DX :适配电缆外径范围。THE RANGE OF CABLE OD SUITED .													
自由公差 Free Tolerances				第三视角 3RD-Projection			单位 Unit	mm	名称 Name		重量 Weight		
长度尺寸 Length Dimensions				核准 Approved					M12B 3/4/5芯焊接型金属直头公插		XXg		
X. ±0.20				审核 Checked					型号 Designation		材料 Material		
. X ±0.10				工艺 Craft					图号 Figure No.		版本 Rev.		
. XX ±0.05		标检 Standardized					图面规格 Size		X1				
角度 Angle		设计 Designed					A4		比例 Scale				
X. ±1.0°							1:1						
. X ±0.5°							页码 Sheet						
							1 / 1						
GMATCH 厦门固迈电气有限公司													
1	2	3	4	5	6	7	8	9	10	11			